


M230i-T

Modular and flexible labelling

With the **M230i-T4** and **M230i-T6** you will get one of the most flexible and safe Print & Apply solutions on the market. Providing a choice of three standard stroke lengths, eight standard non stick pad sizes and left or right hand configuration, the **M230i-T4** and **M230i-T6** is highly configurable to meet your increasingly demanding and dynamic production environments - both today and in the future.

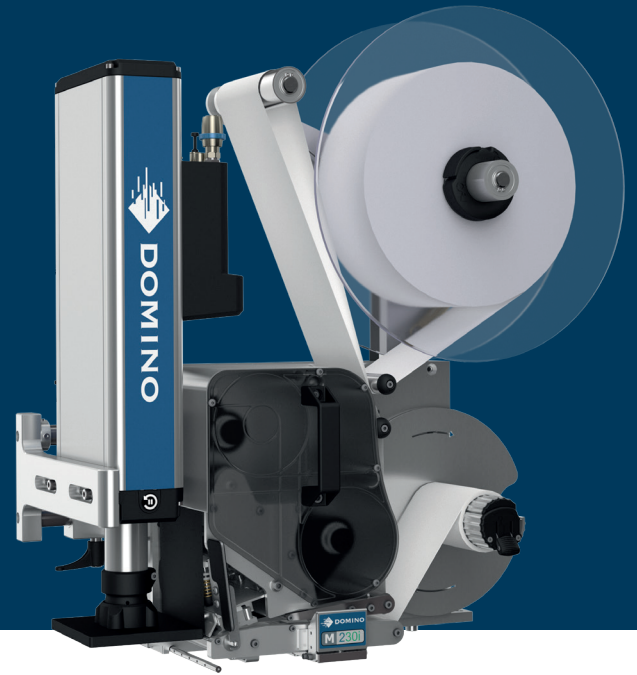

Performance

- ◆ Automatic stroke adaptation to product distances up to 560 mm optimises your throughput.
- ◆ Articulated pad allows for label delivery to product panel variances.
- ◆ Label Check sensor ensures the label does not get lost, ensuring customer satisfaction for your end user.



Maximum uptime

- ◆ 600 m ribbon & label roll capacity within a compact footprint.
- ◆ Unique pad design allows for any label variation without changeover.
- ◆ Simple preventative maintenance access points.
- ◆ Easy to change long life thermal print heads.



Safer by design

- ◆ Innovative pinch point protection to prevent incidental contact injuries.
- ◆ Autostop feature to prevent damage in the event of an obstruction.
- ◆ Air loss detection and protection against system damage.



Modular concept for high flexibility

The modular design of the **M230i-T4** and **M230i-T6** lets you configure your Print & Apply solution to suit your specific needs.

With three standard stroke lengths, reaching products up to 560 mm from the machine, as well as easily switchable pads ranging from 50 x 66 mm to 150 x 210 mm, the solution will give you the flexibility and efficiency you need in your day-to-day operations.



Optional *TouchPanel* User Interface

For effortless control and status reporting *TouchPanel* is our unique, simplified operator interface that gets the printer into action quickly and simply. No complex menus or parameters, just enter the job and away you go.

- ◆ Quick access to favourite menus and settings via large user-friendly icons and customisable home screen.
- ◆ Easy prompted input of data into label templates.
- ◆ Speed up changeovers and help eliminate coding selection errors with simplified Message Store and live WYSIWYG preview.

Technical Specification

For labelling on the top, side or bottom, the **M230i-T** can be configured to suit your specific needs. All M-Series units are equipped with a powerful Printer Control Unit (PCU).

	M230i-T4	M230i-T6
Print width	108 mm (4")	162 mm (6")
Print technology	Thermal Transfer / Direct Thermal	
Resolution	12 dots/mm (300dpi)	
Orientation	Left hand or Right hand	
Label & Ribbon lengths	Up to 600 m	
Typical capacity	60 labels/min	44 labels/min
Distance to product (to center of pad)	Up to 560 mm	
Label sizes (WxL)	25x15* mm - 150x210 mm *55 if Label Check required	
Dimensions (HxWxL)	Min: 625 x 272 x 560 mm Max: 951 x 272 x 671 mm	Min: 625 x 327 x 560 mm Max: 951 x 327 x 671 mm

	PCU
Communication	2xRS232, 1xUSB 2.0, Ethernet
I/Os (configurable)	10 Inputs and 10 Outputs
User interface	Graphical display with 25 languages
Dimensions (HxWxL)	130x280x405 mm

M230i-T4



www.domino-printing.com